



# Cannabis Greenhouse Solutions



All your glazing needs, under one roof



[www.palram.com](http://www.palram.com)







## Main Benefits:



- SECURITY
- LIGHT DIFFUSION
- HIGH LIGHT TRANSMISSION UP TO 90%
- UV PROTECTION
- BUILT IN CONDENSATION CONTROL
- WIDE SERVICE TEMPERATURE RANG
- A COMPLETE SOLUTION - All your glazing needs under one roof



# SUNLITE Plus built-in condensation control glazing system for commercial greenhouse

## Thermal Properties

SUNLITE Plus is available in various configurations. Lightweight and easy to install, our insulated panel accommodates a wide range of temperatures.

Thermal and Optical properties					
Structures	Thickness	U Value (W/m² K)	R (m²K/W)	Light Transmission	Drawing
Twin wall R	8mm	3.3	0.303	80%	
Twin wall R	10mm	3.0	0.333	79%	
Triple wall RS	8mm	3.0	0.333	77%	
Triple wall RS	10mm	2.7	0.37	77%	
Triple wall T&RS	16mm	2.3	0.434	76%	

## Light Deprivation

SUNLITE Eclipse multiwall opaque polycarbonate panels for light deprivation applications

Engineered for complete light deprivation, with a highly reflective, white outer skin and a black core, SUNLITE Eclipse ensures 0% light transmission, yet allows for high reflectance for interior lighting. Its multiwall design offers insulation to help maintain consistent temperatures inside your structure. SUNLITE Eclipse is a durable solution for cannabis greenhouse, processing and storage areas.



## Light Transmittance

SUNLITE Plus provides up to 80% light transmittance with high levels of light diffusion. Its excellent thermal insulation properties are crucial in cold climates.



## Security, Safety & Privacy

Virtually Unbreakable, suitable for extreme load bearing and impact resistance, our polycarbonate solutions provides the highest weather resistance and crop protection available. You will not need to worry about storms, nor for visibility from outside the structure.

## Typical Physical Properties

Property	Method*	Conditions	Units	Value
Density	D-792		g/cm³	1.2
Heat deflection temperature (HDT)	D-648	Load: 1.82 MP	°C	135
Service Temperature - Short term			°C	-50 to +120
Service Temperature - Long term			°C	-50 to +100
Coefficient of linear thermal expansion	D-696		mm/mm °C	6.5x10⁻⁵
Tensile strength at yield	D-638	10 mm/min	MPa	62
Elongation at break	D-638	10 mm/min	%	>90
Impact falling dart	ISO 6603/1		J	40-400
Practical thermal expansion/contraction			mm/m	3

\* ASTM except where noted otherwise.






## SUNTUF Plus corrugated polycarbonate condensation control roofing system for commercial greenhouses.



### Light Transmittance


SUNTUF Plus corrugated polycarbonate condensation control roofing system for commercial greenhouses.

SUNTUF Plus provides 90% light transmission with high levels of light diffusion, and encourages consistent growth with optimal light distribution.

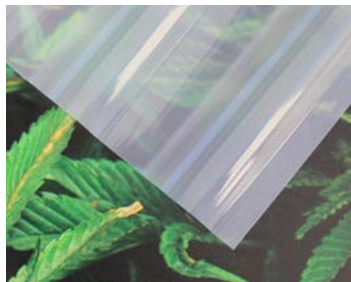

#### Diffuser

Combines uniform light spread with high light transmission.  
85% light transmission.  
100% Diffusion.

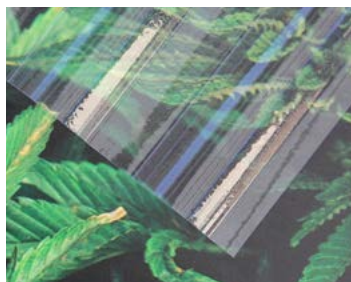


#### Embossed

Offers high light transmission and good diffusion for excellent flexibility.  
90% light transmission.  
20% Diffusion.

### SUNTUF Plus UV resistance


SUNTUF Plus maintains its high optical properties over time. A protective layer prevents UV related degradation of the material and makes SUNTUF Plus an ideal greenhouse cover.

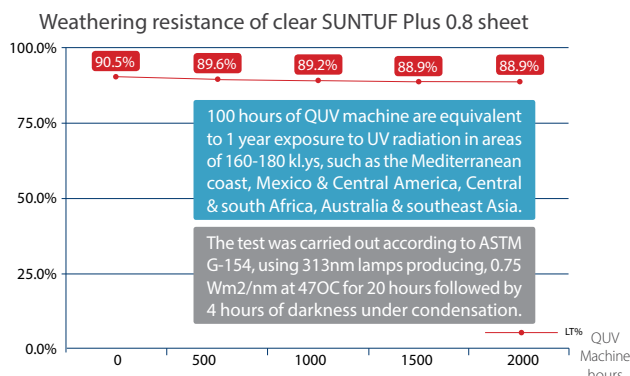

### Built-In Condensation Control

SUNTUF® Plus  
Maintains clarity  
and light transmission


Standard Sheet  
Covered with  
condensation drip

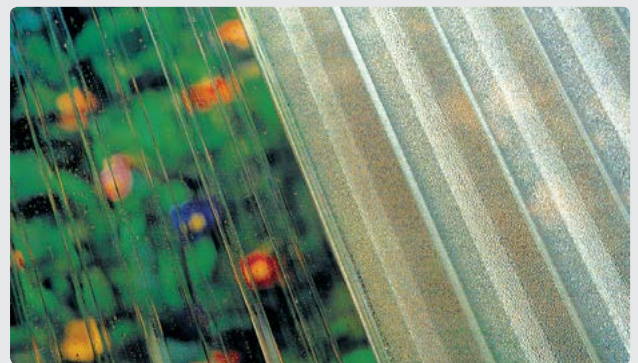

### Hemispheric Light Transmittance


At N45°-N55° latitude, during the 5 critical months between November and March, the sun shines most of the day at a 15°-25° angle with the horizon. SUNTUF Plus refracts light at low angles of incidence, reduces reflection, and facilitates more light penetration into the greenhouse than any other material.

Corrugated Sheet  
Low Sun Angle



High Light Transmission

Flat Sheet  
Low Sun Angle



Low Light Transmission

\* Available in other profiles

All products are warranted for 10 years



#### PALRAM H.Q.

Tel: +972.4.8459.900  
Fax: +972.4.8444.980  
palram@palram.com

#### PALRAM EUROPE LTD.

Tel: +44.1302.380777  
Fax: +44.1302.380788  
sales.europe@palram.com

#### PALRAM AMERICAS

Tel: 610.285.9918  
Fax: 610.285.9928  
palramamericas@palram.com



600605 - 12/2019

In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

©1997 Palram Industries Ltd. | SUNTUF is a registered trademark of Palram Industries Ltd.



**EPSE**  
CERTIFIED EUROPEAN QUALITY

